




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G06F 9/445, 9/44	A1	(11) International Publication Number: WO 00/28414 (43) International Publication Date: 18 May 2000 (18.05.00)
<p>(21) International Application Number: PCT/US99/25383</p> <p>(22) International Filing Date: 28 October 1999 (28.10.99)</p> <p>(30) Priority Data: 09/187,102 5 November 1998 (05.11.98) US</p> <p>(71) Applicant: COMPUTER ASSOCIATES THINK, INC. [US/US]; One Computer Associates Plaza, Islandia, NY 11749 (US).</p> <p>(72) Inventors: WILDE, Martin; 17905 S.W. Jay Street, Aloha, OR 97006 (US). ASHBY, Thomas; 8434 S.W. Charlotte Drive, Beaverton, OR 97007 (US). MATHUR, Atul, Kumar; 8304 S.W. Sunstone Loop, Beaverton, OR 97007 (US).</p> <p>(74) Agents: FLIESLER, Martin, C. et al.; Fliesler Dubb Meyer and Lovejoy LLP, Suite 400, Four Embarcadero Center, San Francisco, CA 94111-4156 (US).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: METHOD AND APPARATUS FOR OPERATING SYSTEM PERSONALIZATION DURING INSTALLATION

(57) Abstract

A method and apparatus for providing personalization parameters to allow an operating system to install itself on a computer system with the provided personalization parameters. A first operating system parameter file (64) is used by the operating system to configure itself. A personalization parameter file is provided and read by an operating system installation process (68) which is initiated in the computer system. The operating system installation process then displays a graphical user interface (49) from which a user selects personalization parameters with which the operating system is to configure itself. An editing module is executed to edit the operating system configuration file to include at least a portion of the selected personalization parameters so that the operating system is configured with the personalization parameters when it installs itself.

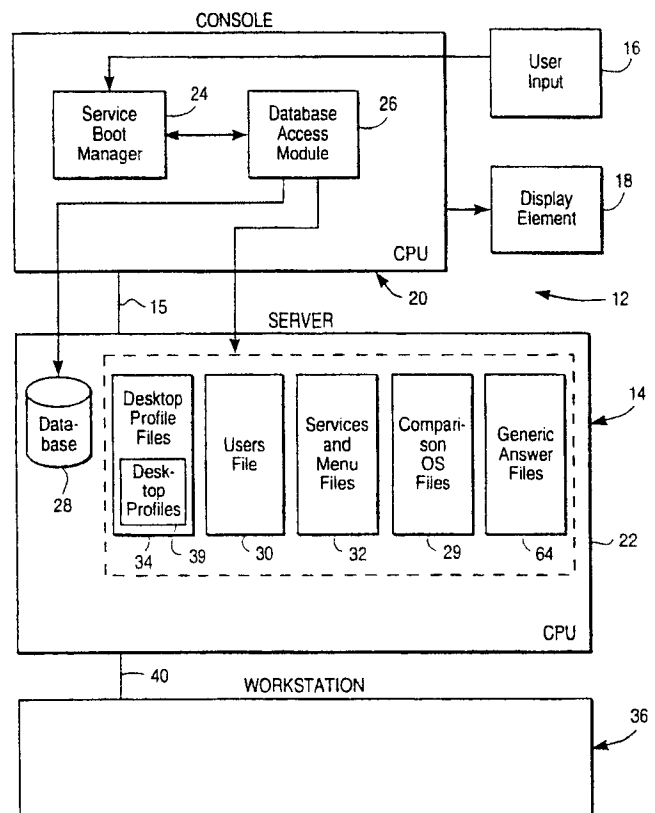

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

METHOD AND APPARATUS FOR OPERATING SYSTEM PERSONALIZATION DURING INSTALLATION

5

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to the field of automated installation of an operating
10 system onto a networked computer. More specifically, the invention includes a
method and apparatus to provide personalization parameters so that an operating
system can be automatically installed on a computer system configured with the
personalization parameters.

15

Description of the Related Art

Installing or migrating updated versions of computer software including
applications and operating systems from a network server to individual networked
client workstations is commonplace. However, such installation or migration can
be relatively labor intensive and complex. This can be especially true in corporate
20 environments where there might be hundreds or even thousands of computers which
are part of a network. Accordingly, applications exist to automate, to varying
degrees, the installation or migration of operating systems from a network server
or host to networked client workstations.

One example of an application for automating installation and/or migration
25 of computer software from a network is referred to under the trade name of
Microsoft Systems Management Server®, and is available from Microsoft®
Corporation of Redmond Washington.

Another example of such an application is marketed under the trade name
LANDdesk(R) Configuration Manager ("LCM") and is available from Intel
30 Corporation of Hillsboro, Oregon. System components necessary to operate LCM

-2-

include a console, a server, and one or more workstations. The console includes a server central processing unit ("CPU"), a monitor, and a data input device such as a keyboard. The server is interconnected with the console and includes a CPU. Each workstation is interconnected with the server and includes a CPU, a monitor,
5 and keyboard. As used herein, CPU indicates any standard, general or special purpose computing device having a microprocessor; memory, such as a magnetic or optical disk drive, random access memory ("RAM") and read only memory ("ROM"); bus lines; and inputs and outputs.

To operate LCM, a systems manager loads configuration manager software
10 onto the console. Configurations for operating systems to be deployed over the network are defined and stored in the server memory. These operating systems are referred to as "services." Operating systems which can be installed using LCM include Windows 95®, Windows 98®, and Windows NT®, each available from Microsoft Corporation. The system administrator also defines configuration
15 manager users ("CM-users") which, as used herein, indicates a technician or administrator who logs onto a workstation for the purpose of installing an operating system or other software from the network server. A CM-user stands in contrast to an "end-user," which, as used herein, indicates a workstation user for whom a workstation is configured for use in data processing and information exchange. The
20 system administrator assigns services to be configured on client workstations to menus and assigns one of these menus to each CM-user who will be deploying services on the workstations. The files containing the menus and identifying CM-users associated with the menus are stored on the server.

Each client workstation on which an operating system to be automatically
25 installed is configured with "LANDesk(R) Service Agent," ("LSA") also available from Intel Corporation. LSA is firmware which is resident on an ethernet card installed in the workstation. When a user boots a client workstation, LSA interrupts the normal boot module and causes a prompt to appear on the workstation monitor

-3-

which asks the user if he or she would like to perform a service boot to access configuration services. If the CM-user chooses to perform a service boot, LSA accesses the configuration manager software located in the server which causes a dialog box to appear on the workstation display asking the CM-user to enter a
5 username and password. If the user enters an appropriate username and password, the configuration manager software downloads certain files and programs, which are discussed below in the Detailed Description section, from the server to the workstation. These programs cause the client workstation monitor to display the menu of services which the system administrator assigned to the CM-user logged
10 onto the workstation, and which are available to be downloaded. The CM-user can select from these services and initiate operating system configuration. Details of the above described operation of LCM are included in "Intel LANDesk® Configuration Manager Administrator's Guide", Intel Corporation, 1997 which is incorporated by reference in its entirety.

15 When configuring an operating system, there are a number of parameters that must be uniquely specified for each workstation on the network and other parameters that must be specified only for a sub-group of the total number of client workstations on a network. These parameters are referred to herein as "personalization parameters." Such personalization parameters which must
20 generally be uniquely specified for each client on a network can include, among others, user login name, full name, initial password, and IP address. Personalization parameters which can generally be specified for a sub-group of client workstations on a network can include workgroup or domain name, organization name, and product ID.

25 For a variety of operating systems, specification and configuration of these personalization parameters can be partially achieved through the use of so called "answer files." An answer file is a script file which specifies various settings for operating system installation including full user name, organization name, computer

-4-

name, product ID, domain name and workgroup name. Generally, answer files are created by a system administrator and reside in memory on the server. The answer files are then accessed by an operating system setup program which is run in the workstation during an operating system deployment to the workstation to at least partially personalize the client workstation. Use of answer files and operating system setup programs is known to those skilled in the art and discussed in detail in "Microsoft® Windows®95 Resource Kit" 1995 Microsoft Press, "Microsoft 98® Resource Kit" 1998 Microsoft Press, ISBN 1-57231-644-6, and Microsoft® Windows® NT Workstation Operating System Deployment Guide", 1997 Microsoft Corporation, which are incorporated in their entirety by reference.

A second way in which personalization parameters can be configured for an operating system is to use an operating system application programming interface ("API"). An API is essentially a line of code that can be executed to access the operating system (or other application) to tell the operating system to perform a lower level function, such as assign a certain I/O port to a certain address, or configure the operating system with certain information, such as a drive mapping user login name. Generally, one API can be used to configure an operating system with a single parameter. APIs are useful in operating system configuration because answer files cannot typically be used to completely configure an operating system. Accordingly, to completely personalize an operating system installation, a CM-user would typically manually edit and execute APIs after operating system installation to configure the operating system with personalization parameters not configurable with an answer file. The use of and syntax for Microsoft operating system APIs is detailed in "Microsoft® Visual C++ 6.0 Reference Library", Microsoft Press, 1998.

However, for at least two reasons, the above described use of answer files and APIs in operating system deployment was relatively time consuming and cumbersome. First, because each individual workstation on a network generally requires at least some unique personalization parameters, for each workstation, an

-5-

answer file would have to be manually edited and stored by the administrator. Thus, if there were 500 workstations on a network, the administrator would have to generate 500 answer files to even partially automate operating system configuration for workstations on the network. Such manual editing could be
5 disadvantageously time consuming and error prone. Second, as noted above, answer files cannot typically be used to configure all of the personalization parameters of a workstation operating system. For example, an answer file cannot typically configure a logon name or initial password. Thus, these personalization parameters would have to be configured by the CM-user for each client workstation
10 using APIs after deployment of the operating system. This could also be disadvantageously time consuming.

There is a need for improvement in the automated deployment of operating systems over a network. For example, it would be desirable to avoid manual editing of each answer file for an operating system deployment. Also, it would be desirable
15 to avoid the need to create an end-user specific answer file for each work station on the network. It would be further desirable to avoid the need to manually execute APIs to configure an operating system with parameters which cannot be configured using an answer file.

20 SUMMARY OF THE INVENTION

The present invention overcomes the above described disadvantages by providing an economical, high performance and adaptable apparatus and method for providing personalization parameters for an automated operating system installation on a computer system. The computer system can include a memory, a first CPU,
25 and a second CPU interconnected with the first CPU to allow the operating system to be downloaded from the first CPU to the second CPU. The method includes providing both an operating system configuration file and a personalization parameters file in the memory. The operating system configuration file is used by

-6-

the operating system to configure itself with personalization parameters contained in the file. On a display element of the second CPU, a graphical user interface ("GUI") is displayed which lists the personalization parameters available in the personalization parameters file. The GUI also allows a user to select a plurality of the personalization parameters from the personalization parameters file. The operating system configuration file is edited by an editing module to include at least a first portion of the selected plurality of personalization parameters. In this way, the operating system can install itself configured with the first portion of the selected plurality of personalization parameters.

10 In another aspect of the method for providing personalization parameters for an automated operating system installation from a first CPU to a second CPU, the computer system is provided with operating system application programming interfaces ("APIs") each of which is for configuring an operating system with a personalization parameter. After the operating system has installed itself, the operating system APIs are edited to each include one of a second portion of the selected plurality of personalization parameters. The plurality of APIs are executed to configure the operating system with the second portion of the selected plurality of personalization parameters.

20 Another aspect of the present invention includes an apparatus for automatically providing personalization parameters for a personalized operating system installation in a computer system. The computer system includes a memory, a first CPU, and a second CPU interconnected with the first CPU to allow the operating system to be downloaded from the first CPU to the second CPU, the second CPU also having a display element. The apparatus includes an operating system configuration file for storing personalization parameters with which the operating system configures itself during an installation. The apparatus also includes a personalization parameters file stored in the memory. A GUI is displayed on the display element of the second CPU. The GUI allows a user to select a

-7-

plurality of the personalization parameters in the personalization parameters file. A first editing module places a first portion of the personalization parameters selected via the GUI from the personalization parameters file into the operating system configuration file. In this way, when the operating system is installed, it
5 configures itself with the first portion of the personalization parameters.

In another aspect of an apparatus for automatically providing personalization parameters for an operating system installation from a first CPU to a second CPU, the apparatus includes a plurality of operating system APIs stored in the memory. Each API is for configuring the operating system with one
10 personalization parameter after installation of the operating system. The apparatus also includes a second editing module and a post-operating system installation module. The second editing module is for placing one of a second portion of the selected personalization parameters from the personalization parameters file into each of the APIs. The post-operating system installation module executes the APIs
15 to configure the operating system with the second portion personalization parameters.

If, for example, the first operating system configuration file is a Microsoft answer file, then the present invention advantageously avoids the need for a system administrator to create an answer file containing end-user specific personalization
20 parameters for each workstation on a network. Rather, the system administrator must only create a single "generic" answer file (that is, an answer file containing parameters that can be used by all the computers on network or a group of computers on a network) and a personalization parameters file. The method and apparatus of the present invention then allows selection of personalization
25 parameters from the personalization parameters file and automatically edits the generic answer file to create a user-specific, updated answer file. The operating system then uses this updated answer file to configure itself during installation.

This can advantageously reduce time required for operating system

-8-

deployment and reduce errors in such deployment. Additionally, the method and apparatus of the present invention can also provide personalization parameters from the personalization parameters file for post-operating system install configuration. Thus, the need for a CM-user to enter such post-operating system installation
5 configuration information via manually executing individual APIs can be reduced or eliminated. This can also advantageously reduce time and errors in operating system deployment.

Yet another aspect of the present invention includes a computer program product stored on a computer readable medium such as a floppy disk. The product
10 is for use in automatically providing an operating system with personalization parameters to allow the operating system to configure itself therewith. The product includes a first program means to allow a user to populate a personalization parameters file with personalization parameters. A GUI means displays a list of personalization parameters in the personalization parameters file and allows
15 selection of a group of personalization parameters therefrom. A first editing means places at least a portion of the selected group of personalization parameters in an operating system configuration file used by the operating system to configure itself. A second program means is for configuring the operating system with personalization parameters after installation of the operating system. A second
20 editing means allows editing of the second program means to include a second portion of the selected group of personalization parameters.

BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the system of the present invention will be
25 apparent from the following description in which:

Figure 1 is a block diagram illustrating a computer system having a networked console, server and workstation in accordance with the present invention.

-9-

Figure 2 is a flow chart illustrating steps which can be completed to configure a server for automatic provision of personalization parameters in accordance with the present invention.

5 Figure 3 is a block diagram illustrating the relationship of services, service menus, CM-users, desktop profile files and desktop profiles in accordance with the present invention.

Figure 4 is a block diagram illustrating server-workstation interaction for automatic provision of personalization parameters in accordance with the present invention.

10 Figure 5 is a flow chart illustrating steps taken by a logon module for automatic provision of personalization parameters in accordance with the present invention.

Figure 6 is a flow chart illustrating steps taken by a menu presentation module and CM-user for automatic provision of personalization parameters in accordance with the present invention.

15 Figure 7 is a flow chart illustrating steps taken by an operating system installation module for automatic provision of personalization parameters in accordance with the present invention.

Figure 8 is a flow chart illustrating steps taken by an operating system setup program for automatic provision of personalization parameters in accordance with the present invention.

Figure 9 is a flow chart illustrating steps taken by a post-OS installation module for automatic provision of personalization parameters in accordance with the present invention.

25 Figure 10A shows one embodiment of an Information screen of a wizard graphical user interface which can be used to enter services and menu information in accordance with the present invention.

Figure 10B shows one embodiment of an Account Information screen of a

-10-

wizard graphical user interface which can be used to enter services and menu information in accordance with the present invention.

Figure 10C shows one embodiment of a Network Information screen of a wizard graphical user interface which can be used to enter services and menu information in accordance with the present invention.

Figure 10D shows one embodiment of a Finish screen of a wizard graphical user interface which can be used to enter services and menu information in accordance with the present invention.

Figure 11 shows an example of a services menu displayed on a monitor of a CPU in which an operating system is to be configured in accordance with the present invention.

Figure 12 shows an example of a desktop profiles menu in accordance with the present invention displayed on the monitor of the CPU shown in Figure 10.

Figure 13 is a flow chart illustrating steps taken by an operating system installation module to edit an answer file.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Disclosed is a method and apparatus for automatically providing personalization parameters for an automated operating system ("OS") installation. Specifically, a system administrator creates a personalization parameters file by inputting and storing personalization parameters. The personalization parameters are arranged in groups, with each group keyed to a specific end-user. When deploying an operating system in a client workstation, a graphical user interface (GUI) is displayed on the workstation for a CM-user deploying the operating system. The GUI lists the groups of personalization parameters with which the operating system may be configured. The CM-user selects one of the groups. A file editing module then edits an operating system configuration file, (which could be a Microsoft answer file or Microsoft Registry database) to include the

-11-

personalization parameters included in the selected group. The operating system automatically uses this configuration file to configure itself either during or after deployment. The present invention can also automatically edit operating system application programming interface ("API") calls at a post-OS installation stage to
5 include personalization parameters. An operating system API is essentially a line of code that instructs the operating system to perform a function or configure itself in some way. Thus, execution of the API's configures an OS with the personalization parameters placed in the API call.

In the following description, for purposes of explanation, specific data and
10 configurations are set forth in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced without the specific details. In other instances, well known systems are shown in diagrammatical or block diagram form in order not to obscure the present invention unnecessarily.

15 The environment in which the present invention is used encompasses a general distributed computing system, wherein general purpose computers, workstations, or personal computers are connected via communication links of various types, in a client-server arrangement, and further wherein programs and data, many in the form of objects, are made available by various members of the
20 system for execution and access by other members of the system.

The present invention is directed to an apparatus and method to provide an OS with personalization parameters for automatic deployment of the OS from a server to a client workstation which is networked with the server. As used herein, "personalization" means configuration of various workstation OS parameters which
25 may be unique to a particular client workstation or user on a network. The specific parameters with which a workstation might be personalized will vary depending on the specific configuration of the network on which the workstation resides. Examples of such personalization parameters, however, can include end-user login

-12-

name, end-user name, organization name, initial end-user password, computer name, domain or workgroup name, and IP address.

As will be discussed in detail below, the disclosed apparatus and process for automatically providing personalization parameters for OS installation is implemented by an CM-user at a client workstation. However, prior to implementation of the present invention, the network server must be configured with personalization parameters using configuration manager software. Such configuration manager software may, but need not be, the LCM software discussed in the background section. Accordingly, the preferred embodiment of the present invention will be described below as implemented with the LCM software, which was first publicly shipped as a part of the 1.5 version of the LCM system on November 7, 1997. It is within the scope of the present invention, however, to be implemented using other configuration manager software designed to provide for automated deployment of an OS to networked workstations. Additionally, the preferred embodiment of the present invention described below makes reference to Microsoft® operating systems. However, the present invention is contemplated for use with any other operating system as well.

Figure 1 illustrates configuration of a network server for automated deployment of an OS to a network workstation. Specifically, Figure 1 is a block diagram of a computer system 10 including a console 12, a server computer 14 and at least one workstation computer 36. Console 12 includes at least a user input device 16 such as a keyboard and/or pointing device such as a mouse, trackball or the like; a display element 18 such as a cathode ray tube ("CRT") or liquid crystal display; and a console central processing unit ("CPU") 20. Server 14 includes at least a server CPU 22. Both the console CPU 20 and server CPU 22 can be any standard, general or special purpose computing device having a microprocessor; memory, such as a magnetic or optical disk drive, random access memory ("RAM") and read only memory ("ROM"); and bus lines and inputs and outputs (not shown).

-13-

Such general or special purpose computers are known to those skilled in the art.

Console 12 is networked to server 14 using a network interconnection 15 as is known. As shown in Figure 1, and discussed below, software and hardware components of console 12 and server 14 communicate with one another. Although
5 arrows between console 12 and server 14 are shown in Figure 1 outside of network interconnection 15, it is to be understood that all such communication takes place over network interconnection 15. Server 14 is networked, via network interconnection 40, with at least one client workstation 36, the details of which will be discussed below. It is to be understood that the computer system 10 shown in
10 Figure 1 is illustrated in conceptual form. Many additional circuits, devices and interconnections of the computer system 10 are not shown in order to not obscure the present invention. Additionally, though Figure 1 illustrates a console which is separate from the server, it is also within the ambit of the present invention to replace the separate console/server configuration with only a single CPU having a
15 monitor and input device.

To configure computer system 10 for automated provision of personalization parameters for an OS deployed to a workstation, a system administrator loads OS configuration software, and preferably LCM software, into the memory of console CPU 20 and the memory of server 14. Installation of LCM
20 software into a console and server is set forth in detail in the "Intel® LANDesk® Configuration Manager Administrator's Guide", Intel Corporation., 1997 which has been incorporated by reference. In the embodiment shown, the configuration software includes at least two modules located in the memory of console CPU 20; the service boot manager 24, and the database access module 26. As used herein,
25 the term "module" refers to a programming language construct that consists of procedures and/or data declarations and that can interact with other such constructs. Such use of the term module is known by those skilled in the art. In the memory of server 14, the configuration software initially includes at least a database

-14-

28. For use with LCM software, it is preferred that database 28 comply with the Open Database Connectivity development standards ("ODBC"), known in the art.

Figure 2 is a flowchart showing the steps to configure computer system 10 for automated OS personalization. In step 100, the system administrator downloads compressed OS files 29 into a memory of the server 14. In step 102, the system administrator accesses the service boot manager 24 to input names of CM-users who will be initiating installations of an OS on the client workstations and a password associated with each CM-user. Database access module 26 accesses the names and associated passwords and places them in a CM-user file 30 which is stored on server 14. In step 104, services menus are created. A services menu is a graphical menu which a CM-user can call up on a workstation display after a service boot has been performed. An example of a services menu 33 displayed on a workstation display 49 is shown in Figure 11. The services menu 49 displays a collection of services available to be installed on the client workstation and, preferably, includes operating systems. For example, the operating systems listed may include, but is not limited to, Windows NT®, Windows 95, Windows 98® and/or Microsoft Disk Operating System ("MS-DOS").

To create services in LCM, the service boot manager generates a wizard user interface on user input 16 of console 12. A wizard user interface consists of one or more sequential screen displays which ask the user questions or request information. Configuration and use of such wizard user interfaces is known by those skilled in the art. The system administrator uses the wizard user interface to enter the name of a service to be created, for example, "Windows®95 Operating System"; the location of the compressed OS files associated with the service; and what type of service is being configured, for example, an operating system or an application.

After configuring services, the system administrator creates a services menu 49. To create a service menu 49 in LCM, the service boot manager 24 generates

-15-

a dialog box user interface on user input 16 of console 12. Configuration and use of such a dialog box user interface is well known by those skilled in the art. The system administrator uses the user interface to input at least the name of the menu to be created, for example, "CM-user1"; and the names of the services to be listed on the menu. These names will be those which were entered when the services were configured as discussed above. Other menu properties such as headers and footers or special menu banners can also be input via the wizard user interface. The services information and service menu information are preferably accessed by the database access module 26 and placed in a services and menu file 32 which is stored in server 14. Creation of services and services menus is detailed in the "Intel LANDesk® Configuration Manager Administrator's Guide."

In step 106, each CM-user is assigned to one of the service menus 33. In LCM, the system administrator typically creates a plurality of service menus 33, as described above, and then assigns CM-users to the service menus 33, preferably using the wizard user interface discussed above. This step is detailed in the Intel LANDesk® Configuration Manager Administrator's Guide. This assignment information is stored in services and menu file 30. If a CM-user is assigned to a service menu 33, that service menu 33 will appear on the client workstation 36 when called up by a CM-user after performing a service-boot on the workstation 36. It is possible for the system administrator to create more than one service-menu 33 and have more than one CM-user deploying operating systems. Thus, as shown in Figure 3, which is a block diagram illustrating the interrelationship of services 31; service menus 33; CM-users 35; desktop profile files 34, which will be discussed below; and desktop profiles 39, which will also be discussed below; each service menu 33 can be assigned to more than one CM-user 35. Preferably, however, only a single service menu 33 is assigned to each CM-user 35.

As shown in Figure 1, in addition to storing user information in user file 30 and service and menu information in services and menu files 32, database access

-16-

module 26 can also store this information in database 28 in server 14. This storage can occur at the same time that user file 30 and services and menu files 32 are created. It is also considered, however, that users file 30 and services and menu file 32 not be created until needed for an OS installation. That is, database access
5 module 26 can access the information in database 28 when necessary to create user file 30 and services and menu files 32 at the time of OS installation into a workstation 36.

A file referred to as an operating system configuration file or "answer" file can be used to facilitate the automatic or self-installation of an OS. Specifically, an
10 OS "setup program," which automatically installs an operating system from one location or drive in a computer system to another, uses an answer file to configure a number of OS parameters in the operating system being deployed. The OS parameters are contained in the answer file and are referred to herein as either personalization parameters or "generic" parameters. The term "generic" refers to
15 OS parameters which can be used by all, or at least a subset, of the workstations on a network, as opposed to only a single user or workstation on a network. Such generic parameters can include, for example, the target path to write OS files to on the client workstations, keyboard layout, display type and drivers, and/or pointing type and drivers, to name a few. Personalization parameters which an answer file
20 can contain include username, domain name, and IP address, to name a few. During OS deployment by an OS setup program, the setup program retrieves the generic and personalization OS parameters from an answer file and configures the operating system with these parameters. Details of the use of setup programs, and configurations of answer files therefore, for Windows®NT, Windows®95 and
25 Windows®98 is provided in, respectively, "Microsoft® Windows®NT Workstation Operating System Deployment Guide," "Microsoft® Windows®95 Resource Kit," and "Microsoft® Windows®98 Resource Kit," each of which has been incorporated by reference.

-17-

The present invention can use an answer file to automatically provide personalization parameters which an OS will configure itself with during a deployment thereof by a setup program. Specifically, an editing module, discussed in detail below, automatically places user selected personalization parameters in the answer file.

As shown in step 108 of Figure 2, prior to OS deployment, the system administrator preferably creates at least a single "generic" answer file 64 (that is, an answer file containing generic OS parameters) for each service to be included in a services menu, and stores each generic answer file 64 in the server 14, as shown in Figure 1. Generic answer file 64 can be created using standard text editors.

Answer files 64 are formatted to include bracketed section headers, keys, and values for those keys. A sample of a portion of an answer file 64 is shown below:

```
[UserData]
FullName = "Joe Smith"
OrgName = "ABC Company"
[Network]
JoinDomain = 1
[Tcpip Parameters]
IPAddress = 123.123.171.93
```

In this sample portion, the section header "[UserData]" contains the "FullName" key, the value of which is "Joe Smith" and the "OrgName" key, the value of which is "ABC Company". the "FullName" key gives the full name of the user and the "OrgName" key gives the organization name in which the network is used. As will be discussed in detail below, the present invention includes an editing module which can access and edit generic answer file 64 with personalization parameters to create an updated answer file which can then be used during OS deployment.

-18-

In addition to the creation of users file 30, services and menu files 32, and at least one generic answer file 64, in order to configure the network server 14 for automatic OS personalization, as shown in step 110 of Figure 2, the system administrator must also create a personalization parameters file. As discussed below, the present invention uses an editing module to place selected personalization parameters contained in this personalization parameters file into the generic answer file 64. In LCM, the personalization parameters file is referred to as a desktop profiles file 34. Each desktop profiles file 34 preferably contains at least one, and probably more than one, individual desktop profile 39. Each desktop profile 39 contains end-user personalization parameters such as end-user login name, full end-user name, organization name, computer name, domain or workgroup name, and workstation IP address. Desktop profile files 34 are preferably configured in a Microsoft initialization file format well known to those skilled in the art. In the present invention, as discussed in detail below, the editing module which edits the generic answer file 64 places CM-user selected personalization parameters in the generic answer file from the desktop profile file.

An example of a portion of a desktop profile file 34 is shown below:

```
[Computer 1]
Name = Joe's computer
IsInDomain = 1
IPAddress = 123.123.172.78
LoginID = JoeSmith
InitialPassword = jsmith
[Computer 2]
Name = Joe's computer
IsInDomain = 1
IPAddress = 123.123.171.79
LoginID = JoeSmith
```

-19-

InitialPassword = jsmith

Individual desktop profiles are set off by a bracketed section headers. In the portion shown, the section headers "[Computer 1]" and "[Computer 2]" each indicate separate desktop profiles 39. The section header is preferably followed by a plurality of keys, each key indicating a personalization parameter. Each key has an argument which indicates the value of the key. In the example shown, the section headers "[Computer 1]" and "[Computer 2]" each have a "Name" key with the value "Joe's computer." This indicates that the name of the user for both computer 1 and computer 2 is "Joe". Thus, the user "Joe" has at least two desktop profiles, one could be, for example, a desktop computer and the second could be for a laptop computer. The key "IsInDomain" indicates the domain in which the configured workstation will reside. The key "IPAddress" gives the IP address for the workstation and the keys "LoginID" and "InitialPassword" give the login ID and initial password for the end-user. It is to be understood that numerous other keys can also be used in the desktop profile file, for example, keys to indicate a computer name, product ID, and an organization name, to name a few.

Preferably, personalization parameters for desktop profile files 34 is entered by a system administrator at input 16 through a wizard user interface separate from the wizard interface generated by service boot manager 24. Figures 10A-10D are screen reproductions showing the wizard screens used to enter personalization parameters for desktop profiles. Figure 10A shows an "Information" screen 208. Block 210 lists the different screens which can be accessed by clicking with a mouse or other pointing device the icon next to the name of the screen. These screens include "Information," "Account Information," "Network Information," and "Finish," each of which will be discussed below. Block 212 is used to enter the name for the desktop profile; block 214 is used to enter the computer name; block 216 is used to enter the full end-user name; block 218 is used to enter the organization name; and block 220 is used to enter a product identification number.

-20-

"Next" and "Back" buttons 222 allow the system administrator to move to the next entry screen or the previous entry screen. "Finish" button 224 closes the wizard and causes the information entered to be stored in server 14 as described below. "Cancel" button 226 allows the system administrator to close the wizard without
5 storing any entered information. "Help" button 228 accesses an on-screen help application.

Figure 10B shows an "Account Information" screen 230. Block 232 is used to enter an end-user login name; block 234 is checked if the end-user is to be a member of an administrator's group; block 236 is used to enter an end-user
10 password; block 238 confirms the password entered in block 236; block 240 is used to enter an administrator password; and block 242 is used to confirm the administrator password.

Figure 10C shows a "Network Information" screen 243. Block 244 is checked if workstation 36 or the end-user is to be a member of a workgroup or
15 domain. If block 244 is checked, the system administrator can fill in blocks 246, 248 and/or 250. Block 246 is used to enter the workgroup name; block 248 is used to enter the domain name; and block 250 is used to enter the account domain. block 252 is checked if workstation 36 will have an IP address. If block 252 is checked, then the system administrator can fill in blocks 254, 256, 258 and/or 260.
20 Block 254 is checked if workstation 36 is to obtain its IP address from server 14; block 256 is checked if workstation 36 is to obtain its IP address from an answer file during OS configuration. If block 256 is checked, then blocks 258 and 260 can be completed. Block 258 is used to enter the IP address and box 260 is used to enter the subnet mask. Figure 10D shows a "Finished" screen 262 which is
25 displayed when the system administrator has completed entry of personalization parameters for an end-user or workstation.

As shown in Figure 1, the information input by the system administrator for the desktop profile files can be accessed from the service boot manager 24 by

-21-

database access module 26 and stored in database 28. Preferably, simultaneous with this database storage, desktop profile files 34 are created and stored in server 14. It is also considered that at the time of OS deployment in workstation 36, database access module 26 can access the desktop profile information from database
5 28 to create desktop profile files 34.

Preferably, as shown in step 112 of Figure 2 and in Figure 3, each desktop profile file 34 is assigned to a single CM-user 35. Accordingly, each desktop profile file 34 preferably contains the all the desktop profiles 39 with which the CM-user 35 will be personalizing OS installations. Thus, also as shown in Figure 3, there can
10 be many desktop profiles 39 in each desktop profile file 34.

After services and menu files 32, users file 30, desktop profile files 34, and generic answer file 64 have been created, the server 14 is configured for provision of personalization parameters for automated deployment of an OS to workstation 36 networked to server 14. Figure 4 illustrates operation of the present invention
15 to automatically provide personalization parameters for automated deployment of an operating system therein. Figure 4 is a block diagram showing server 14 networked to workstation 36 via network interface 40. Workstation 36 includes a workstation CPU 38 and workstation input /output ("I/O") 42, which allows user interaction with workstation CPU 38 and preferably includes a keyboard 47 and a
20 monitor 49. Workstation CPU 38 can be any type of special or general purpose CPU and preferably includes memory, a microprocessor, bus lines, and inputs and outputs (not shown). Any number of additional workstations 44 can also be networked with server 14 and workstation 36.

Before deploying an OS in a workstation, the CM-user must log-on to the
25 workstation. As shown in steps 114 and 116 of Figure 5, a CM-user performs a service boot via workstation I/O 42. A "service boot" interrupts the normal workstation computer boot process to connect workstation 36 to the configuration manager either in the console 12 or, preferably, the server 14. As detailed in the

-22-

Intel LANDesk Configuration Manager Administrator's Guide, a service boot is performed in LCM by logging onto the client workstation 36, interrupting the normal boot process, and entering the CM-user's logon name and password. As noted in the Background section, this procedure preferably accesses LANDesk®
5 Service Agent ("LSA") 80 firmware located in an ethernet card installed on workstation 36 and provides for a connection between workstation 36 and server 14. Preferably, once connected to server 14, configuration manager modules are downloaded to workstation 36. Preferably, the configuration manager software downloaded by the server 14 into the workstation memory includes at least a logon
10 module 51, a menu presentation module 52, and an OS installation module 54. Preferably, as detailed below, an OS setup program 68, and a post-OS installation module 90 are downloaded at a later time. Each of these modules is discussed below.

After service boot 116 has been performed, the CM-user must select an
15 operating system to be deployed to workstation 36. To facilitate this, the logon module 51 reads the user name that was used to log on and reads users file 30 in server 14 to determine with which CM-user the user name is associated and which desktop profile file 34 is associated with the particular CM-user. Then, as shown in step 120 of Figure 5, the logon module 51 sets a "comprofiles" environment
20 variable 95 in workstation 36. The value of comprofiles environment variable 95 is the desktop profile file 34 assigned to the CM-user who has performed the service boot. As shown in step 122 of Figure 6, which shows the steps implemented by the menu presentation module 52, the menu presentation module 52 reads the comprofiles environment variable and retrieves the services menu assigned to the
25 particular CM-user from the services and menu files 32 in server 14. In step 124, the menu presentation module 52 displays the services menu 33 on monitor 49 as shown in Figure 11. Display in menu format of information contained in a file is well known to those skilled in the art. The CM-user then selects from the service

-23-

menu 33 the operating system to be deployed on workstation 36. At this point, the OS setup program 68 associated with the selected operating system is downloaded into workstation 36.

After selection of an operating system to be deployed, a GUI on the monitor
5 49 of workstation 36 is displayed to allow the CM-user to select a group of personalization parameters with which the selected operating system will be configured. The GUI advantageously allows a CM-user to quickly select a group of personalization parameters with which the selected operating system is to be configured without the need to manually edit an answer file or manually execute
10 individual APIs. To create and display the GUI, using the value from the comprofiles environment variable 95, the menu presentation module 52 reads the desktop profile file 34 associated with the CM-user who is logged on and creates a menu item for each desktop profile included in the desktop profile file 34. For example, if a desktop profile file 34 contained the section headings "[Computer 1]" and "[Computer 2]", then these two section headings would appear in the desktop
15 profile menu. Then, as shown in step 128 and Figure 12, the menu presentation module 52 displays the desktop profile menu 53. The desktop profile file 34 from which desktop profile menu 53 was generated would have the section headings "[Computer 1]", "[Computer 2]", and "[Computer 3]". As shown in step 130 the
20 CM-user selects from the desktop profile menu 53 which desktop profile is to be used. The CM-user can do this using keyboard 47 or any other input device such as a mouse, trackball, or other pointing device. As shown in step 132, the menu presentation module 52 then stores the section heading of the selected desktop profile in an "selectedcomp" environment variable 97 located in workstation 36.

25 After display of the GUI and selection of a group of personalization parameters with which the deployed operating system is to be configured, an editing module of the present invention places the personalization parameters from the selected group in generic answer file 64 to create an updated answer file 66.

-24-

Figures 7 and 8 illustrate the steps of this editing process. Initially, in step 134, an editing module, referred to as an "OS installation module" 54, reads the value of comprofiles environment variable 95 and then, in step 136 reads the value of selectedcomp environment variable 97. In steps 138 and 140, OS installation module 54 opens the desktop profile file 34 designated in comprofiles and retrieves the attributes of the selected desktop profile 39 designated in selectedcomp. In step 142, OS installation module retrieves and updates generic answer file 64 with the parameters identified in the selected desktop profile.

As shown in Figure 13, to update the generic answer file 64, in step 310, OS installation module 54 reads the first key under the section head of the selected desktop profile 39. The installation module 54 automatically edits the generic answer file 64 with a portion of the personalization parameters in desktop profile 39. This advantageously avoids the need to manually edit generic answer file 64. In step 312, OS installation module 54 compares the first key under the section head of the selected desktop profile 39 with a list of parameters which can be placed in an answer file to determine whether the answer file can be edited with the value of the key. The list of keys which can be placed in an answer file is preprogrammed in OS installation module 54. If the value of the key can be placed in an answer file, OS installation module 54 reads the value of the key and looks for the matching key in generic answer file 64. In step 314, OS installation module 54 then places the value of the key in the argument of the matching key in generic answer file 64. In steps 316 and 318, if the key in the desktop profile is not the last key, OS installation module 54 moves to the next key. If the key in the desktop profile is the last key, OS installation module 54 exits. If the key in the desktop profile is not a parameter which can be placed in an answer file, in step 322 and 324, OS installation module 54 determines if it is the last key in the desktop profile and if it is not, module 54 moves on to the next key. If the desktop profile key is the last key, the OS installation module exits.

-25-

For example, if the first three lines of a selected desktop profile 39 appear as follows;

[Computer 1]

IPAddress = 123.123.123.78

5 InitialPassword = jsmith

then OS installation module 54 will read the key, "IPAddress"; check to see if this key is one with which an answer file can be configured; locates the "IPAddress" key in generic answer file 64; and place the value 123.123.123.78 in the argument of the "IPAddress" key in generic answer file 64. OS installation
10 module will then move on to the "InitialPassword" key. It will discover that this key cannot be configured in an answer file, thus, it will move on to the next key or exit if "InitialPassword" is the last key in desktop profile 39.

After moving through all the keys in desktop profile 39, OS installation module exits to step 144. In step 144, the OS installation module 54 stores an
15 updated answer file 66 in workstation 36. In step 146, the OS installation module 54 places the values of compfiles environment variable 95 (the selected desktop profile file) and selectedcomp environment variable 97 (the selected desktop profile index) in a initialization file "continue.ini" 72 to be used for post-OS install personalization as detailed below.

20 At this stage, as shown in Figures 4 and 8, the installation of the OS into the workstation CPU 38 is initiated by an OS setup program 68 located in workstation 36. In step 150 of Figure 8, which shows the steps completed by OS setup program 68, OS setup program 68 reads the compressed OS files 70 from server 14 associated with the service selected by the CM-user, and in step 152, decompresses
25 the OS files 70. As shown in step 154, the OS being installed then reads the updated answer 66 file from the workstation 36 which was stored there by the OS installation module 62 and, in step 156 installs using the parameters from the updated answer file 66. As noted above, because the OS being installed is

-26-

programmatically designed to use an answer file during installation, steps 154 and 156 are built into the OS installation program 68. Also as noted above, details of the use and operation of setup programs for Windows®NT, Windows®95 and Windows®98 is provided in, respectively, "Microsoft® Windows®NT Workstation
5 Operating System Deployment Guide," "Microsoft® Windows®95 Resource Kit," and "Microsoft® Windows®98 Resource Kit," each of which has been incorporated by reference.

As detailed above, the present invention automatically generates a GUI whereby a CM-user can quickly and easily select a group of personalization
10 parameters with which an OS can be configured. OS installation module 54 then edits generic answer file 64 with personalization parameters from desktop profiles file 34 to create an updated answer file 66 that includes the selected personalization parameters. In this way, the present invention advantageously allows a system administrator to deploy personalized operating systems to a plurality of
15 workstations 44 on a network without having to manually edit an answer file for each deployment. With the present invention, the system administrator only needs to create one generic answer file 64 for each type of OS which may be deployed and a desktop profile file for each CM-user who will be deploying an OS. Because there are fewer files to manually edit, this can advantageously simplify and make
20 more reliable the process of OS deployment into networked workstations. Further, it can reduce the time necessary to accomplish such deployment.

As noted above, not all OS personalization parameters can be stored in, and then read from, an answer file. Parameters that cannot be stored in an answer file can include end-user login name and end-user password. As such, the present
25 invention includes a second editing module referred to as post-OS installation module 90, which is downloaded to workstation 36 after setup program 68 has run to install the operating system. Post-OS installation module 90 can edit a plurality of operating system application programming interfaces ("APIs") to include

-27-

non-preinstallation configurable personalization parameters. An API is a routine that a configuration manager (or any other program) can use to request an operating system to perform lower-level services.

As shown in Figure 9, step 158, which shows the steps completed by
5 post-OS installation module 90, post-OS installation module 90 detects from OS
setup program 68 when OS setup is complete. Then, in step 160, post-OS
installation module 90 reads continue.ini file 72 for the values of comprofiles
environment variable 95 and selectedcomp environment variable 97. In step 162,
post-OS installation module 90 reads the desktop profile file 34 designated in
10 comprofiles environment variable 95 for keys indicating personalization parameters
to be configured at the post-OS install stage. Post OS install module 90 is
preprogrammed to recognize such keys. For example, for the end-user login name,
the post-OS installation module 90 finds the "LoginID" key and retrieves its value.
For the end-user password, post OS-installation module 90 finds the
15 "InitialPassword" key and retrieves its value.

Post-OS installation module 90 then places these retrieved values in
arguments of APIs. These APIs are essentially lines of code in post-OS installation
module 90. For example, to configure an end-user login name for Windows®NT,
Windows®95, and Windows®98 operating systems, the lines of code appear as
20 follows:

```
USER_INFO_2
UserInfo_2;
UserInfo_2.useri2_name = p_pusUserName;
NetUserAdd( p_pusWorkstationName, 1, &UserInfo_2, &Error );
```

25

Where:

```
p_pusUserName = LoginID
and
```

-28-

p_pusWorkstationName = the computer name of the workstation being configured

The "p_pusUserName" portion of the API is the argument which is replaced with the value of the "LoginID" key in the selected desktop profile. As such, to edit
5 the end-user login name API, post-OS install module 90 reads desktop profile 39 and retrieves the value for the key "LoginID" and places it in the "p_pusUserName" location in the API. Specifically, if the value for "LoginID" in the selected desktop profile 39 was "JSmith", then post-OS installation module would place "JSmith" in the argument of the API call to appear as "UserInfor_2.usri2_name = JSmith." The
10 computer name of the workstation being personalized (which was already configured using the answer file as described above) is also included in the API to associate the end-user login ID with the correct workstation. The Post-OS installation module 90 then executes the API which automatically configures the installed OS to have an end-user login name of JSmith. As noted in the background
15 section, the use of and syntax for Microsoft® operating system APIs is detailed in "Microsoft® Visual C++ 6.0 Reference Library", Microsoft® Press, 1998.

By automatically editing APIs to include parameters from a desktop profile, the present invention advantageously allows a CM-user to deploy a OS in a workstation without the need to manually enter values for such parameters for each
20 workstation. This can simplify and save time in the OS deployment process and make the process more reliable.

As described above with reference to Figures 8 and 9, it is possible for the present invention to update and use an answer file in configuration of an operating system. However, it is also within the scope of the present invention to use only the
25 post-OS installation method and apparatus described above for automated OS personalization. That is, the post-OS install module 90 can read all the personalization parameters designated by the comprofile environment variable 95 and selectedcomp environment variable 97, and place these parameters in the

-29-

appropriate API calls. In this way, the steps described above involving use of an answer file for operating system configuration could advantageously be eliminated.

Having described the invention in terms of a preferred embodiment, it will be recognized by those skilled in the art that various types of general purpose
5 computer hardware may be substituted for the configuration described above to achieve an equivalent result.

-30-

CLAIMS

What is claimed is:

- 5 1. A method for providing personalization parameters to allow an operating system to install itself with the provided personalization parameters on a computer system, the computer system including a memory, a first central processing unit (CPU), and a second CPU interconnected with the first CPU to allow the operating system to be installed from the first CPU to the second CPU, the method
- 10 comprising:
- providing an operating system configuration file in the memory and used by the operating system to configure itself;
 - providing a personalization parameters file in the memory;
 - 15 displaying a graphical user interface (GUI) on a display element of the second CPU, the GUI for displaying a list of a personalization parameters available in the personalization parameters file and allowing a user to select a plurality of the personalization parameters from the personalization parameters file; and
 - 20 automatically editing the first operating system configuration file to include at least a first portion of the selected plurality of personalization parameters.
- 25 2. The method of claim 1 further including the step of accessing the operating system configuration file in the memory to allow automated configuration of the operating system on the second CPU with the first portion of the selected plurality of personalization parameters.
3. The method of claim 1 further including the steps of:

-31-

- providing a plurality of operating system application programming interfaces (APIs) each one of the plurality of operating system APIs for configuring the operating system with a personalization parameter;
- 5 after the operating system has been deployed on the second CPU, automatically editing the plurality of operating system APIs to each include one of a second portion of the selected plurality of personalization parameters; and
- 10 executing the plurality of operating system APIs to configure the operating system with the second portion of the selected plurality of personalization parameters.
4. The method of claim 3 wherein:
- 15 providing a personalization parameters file includes configuring the plurality of personalization parameters in groups with each group keyed to one of a plurality of unique user identifiers; and
- displaying a GUI includes displaying a list of the plurality of unique user identifiers.
- 20 5. The method of claim 4 wherein:
- providing an operating system configuration file includes providing the first operating system configuration file in a memory of the first CPU; and
- providing a personalization parameters file includes providing the
- 25 personalization parameters file in a memory of the first CPU.
6. The method of claim 5 wherein the operating system is a Microsoft Windows operating system.

-32-

7. The method of claim 6 wherein:
providing an operating system configuration file includes providing a
Microsoft answer file; and
automatically editing the operating system configuration file includes
5 placing in the Microsoft answer file a portion of the selected
plurality personalization parameters selected by the GUI which can
be placed in a Microsoft answer file.
8. A method for providing personalization parameters to allow an operating
10 system to configure itself on a computer system with the provided personalization
parameters, the computer system including a memory, a first central processing unit
(CPU), and a second CPU interconnected with the first CPU to allow the operating
system to be installed from the first CPU to the second CPU, the method
comprising:
15 providing a plurality of operating system APIs in the memory and for
configuring the operating system with personalization parameters;
providing a personalization parameters file in the memory;
displaying a graphical user interface (GUI) on a display element of the
second CPU, the GUI for displaying a list of a personalization
20 parameters available in the personalization file and allowing a user
to select a plurality of the personalization parameters from the
personalization parameters file;
automatically editing the plurality of operating system APIs to each include
one of the selected plurality of personalization parameters; and
25 executing the plurality of operating system APIs to configure the operating
system with the of the selected plurality of personalization
parameters.

-33-

9. An apparatus for use in a computer system having a memory, a first CPU, a second CPU having a display element, and an interconnection between the first CPU and second CPU, the apparatus for automatically providing personalization parameters to allow an operating system to configure itself with the personalization parameters upon installation of the operating system from the first CPU to the
5 second CPU, comprising:

a operating system configuration file stored in the memory and for storing personalization parameters with which the operating system can configure itself during an installation thereof;
10 a personalization parameters file stored in the memory;
a graphical user interface (GUI) displayed on the display element of the second CPU and for allowing a user to select a plurality of the personalization parameters in the personalization parameters file;
a first file editing module that places a first portion of the personalization
15 parameters selected via the GUI from the personalization parameters file into the operating system configuration file.

10. The apparatus of claim 9 further including:
a plurality of operating system APIs stored in the memory, each one of the
20 plurality of operating system APIs for configuring the operating system with a personalization parameter after installation of the operating system;
a second editing module for placing one of a second portion of the personalization parameters selected via the GUI from the
25 personalization parameters file into each of the plurality of operating system APIs; and
a post-operating system installation module for executing the plurality of operating system APIs.

-34-

11. The apparatus of claim 10 wherein the personalization parameters file includes a plurality of unique user identifiers and the personalization parameters are arranged in a plurality of groups, each group keyed to a single unique user identifier.
- 5 12. The apparatus of claim 11 wherein the GUI displays a list of the plurality of unique user identifiers such that selection of one of the plurality of unique user identifiers selects the group of personalization parameters keyed to the selected one of the plurality of unique user identifiers.
- 10 13. The apparatus of claim 12 wherein:
the operating system configuration file includes a Microsoft answer file; and
the first portion of the personalization parameters selected via the GUI
includes personalization parameters which can be included in a
Microsoft answer file.
- 15 14. An apparatus for use in a computer system having a memory, a first CPU, a second CPU having a display element, and an interconnection between the first CPU and second CPU, the apparatus for automatically providing personalization parameters to allow an operating system to configure itself with the personalization parameters upon installing the operating system from the first CPU to the second CPU, comprising:
- 20 a plurality of operating system APIs stored in the memory, each one of the plurality of operating system API for configuring the operating system with one personalization parameter after installation of the operating system;
- 25 a personalization parameters file stored in the memory;
a graphical user interface (GUI) displayed on the display element of the second CPU and for allowing a user to select a plurality of the

-35-


personalization parameters in the personalization parameters file;
an editing module that places one of the plurality of personalization
parameters selected via the GUI from the personalization
parameters file into each of the plurality of operating system APIs;
5 and
a post-operating system installation module for executing the plurality of
operating system APIs to configure the operating system with the
plurality of personalization parameters.

10 15. A computer program product encoded with computer readable program
means for use in automatically providing an operating system with personalization
parameters to allow the operating system to configure itself therewith, the computer
readable program means comprising:

15 a first program means to allow a user to populate a personalization
parameters file with personalization parameters;
a graphical user interface means for displaying a list of personalization
parameters in the personalization parameters file and allowing
selection of a group of personalization parameters therefrom; and
a first editing means for placing at least a portion of the selected group of
20 personalization parameters in an operating system configuration file
used by the operating system to configure itself.

16. The computer program product of claim 15 further including:
a second program means for configuring the operating system with
25 personalization parameters after installation of the operating system;
and
a second editing means for editing the first program means to include a
second portion of the selected group of personalization parameters.

1/15

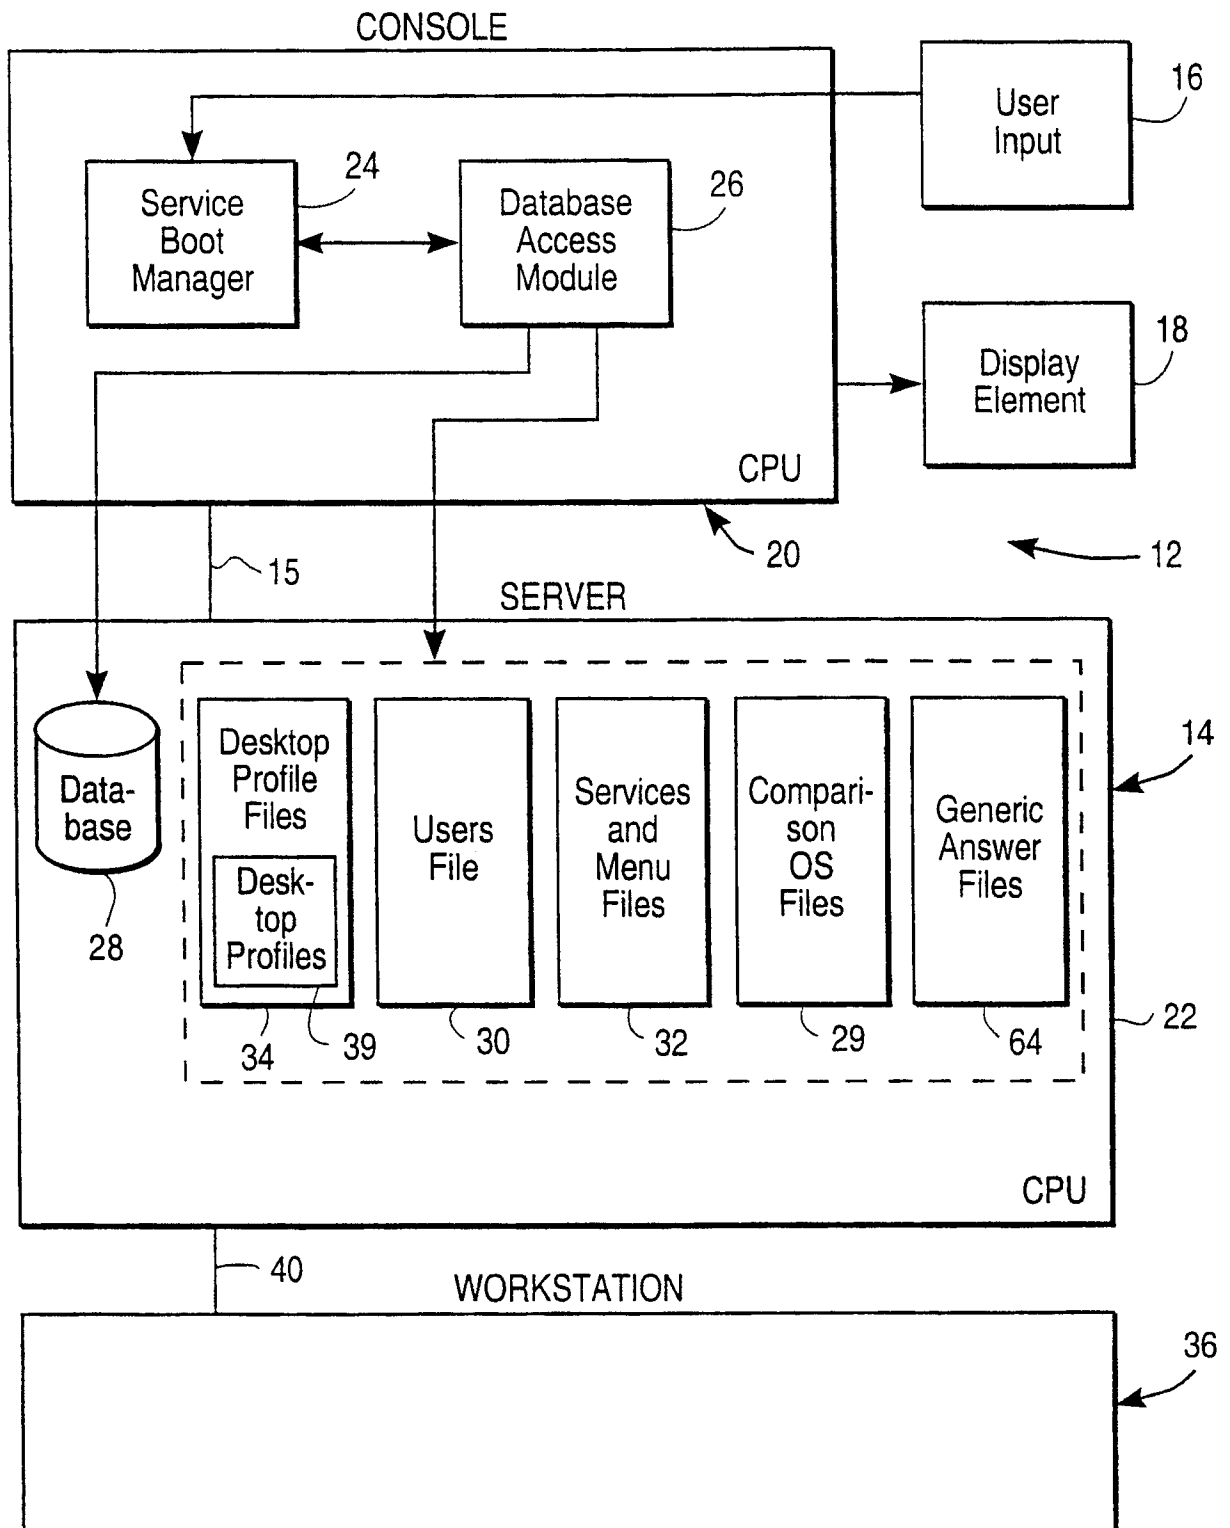

10

FIG. 1

2/15

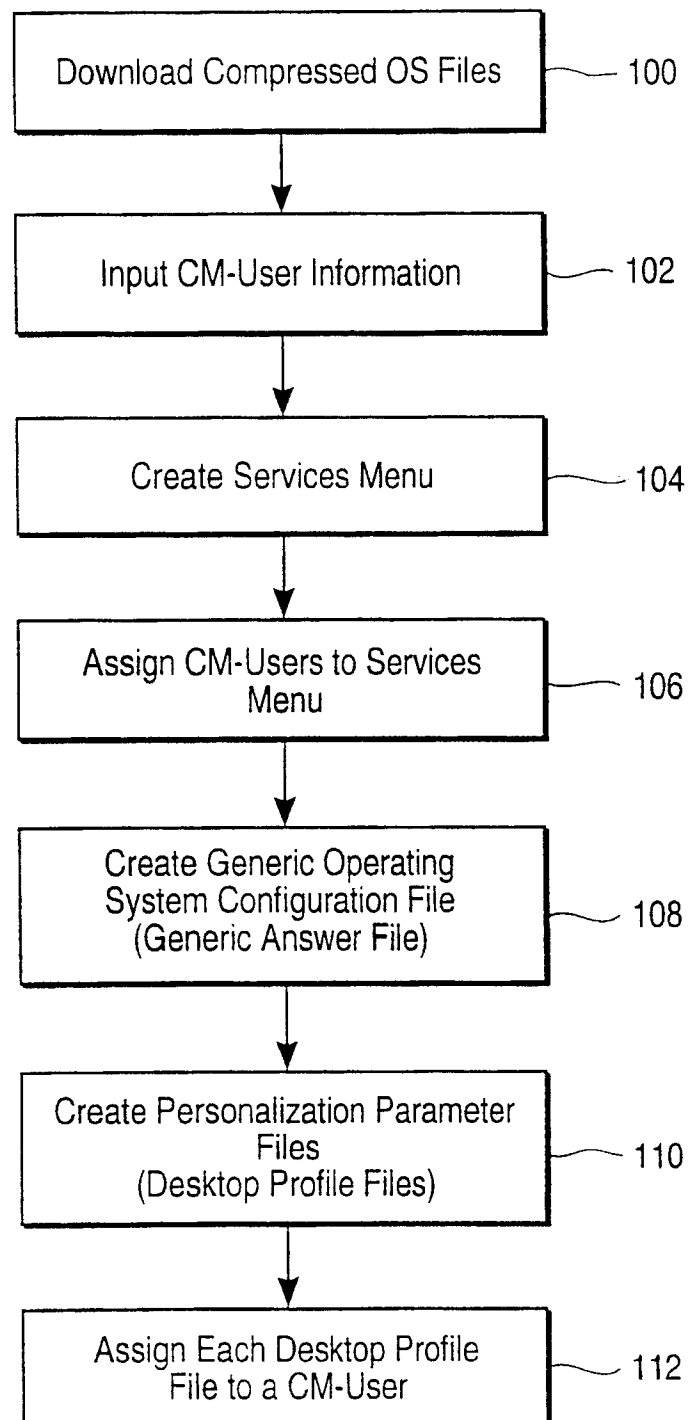


FIG. 2

3/15

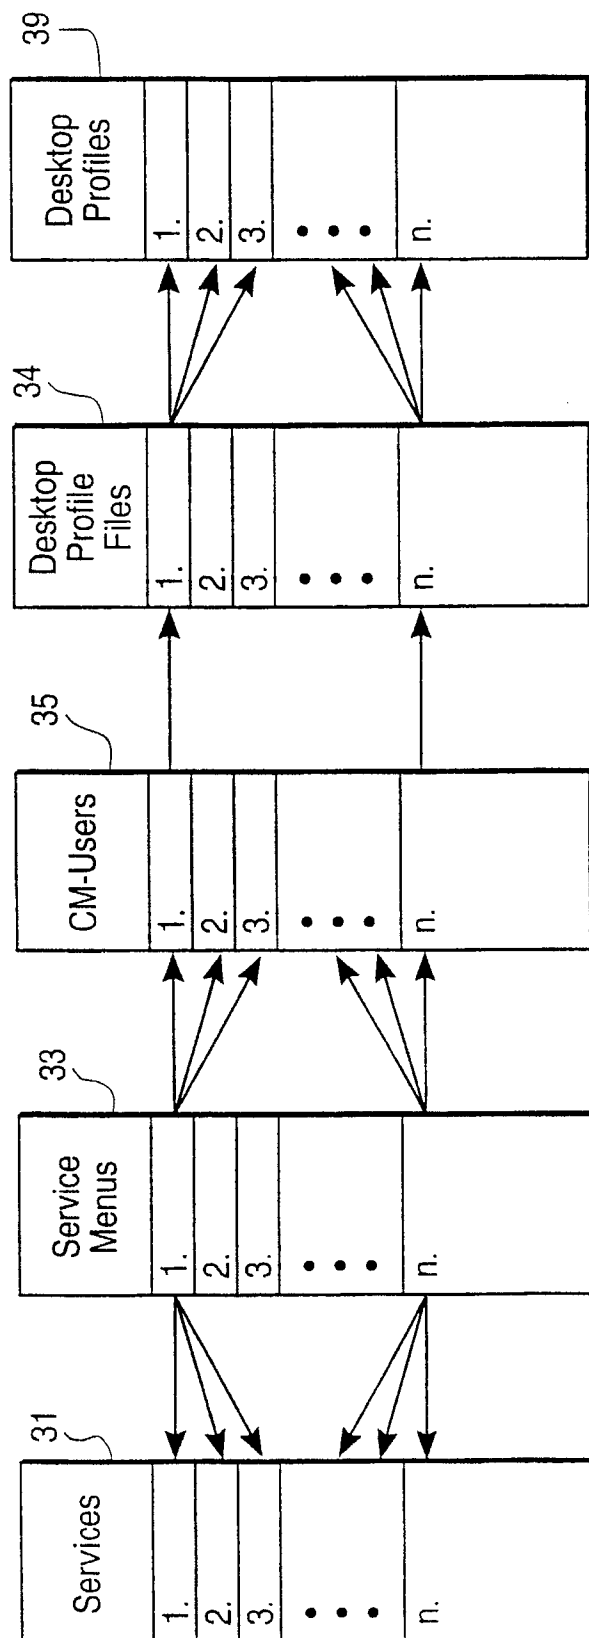


FIG. 3

4/15

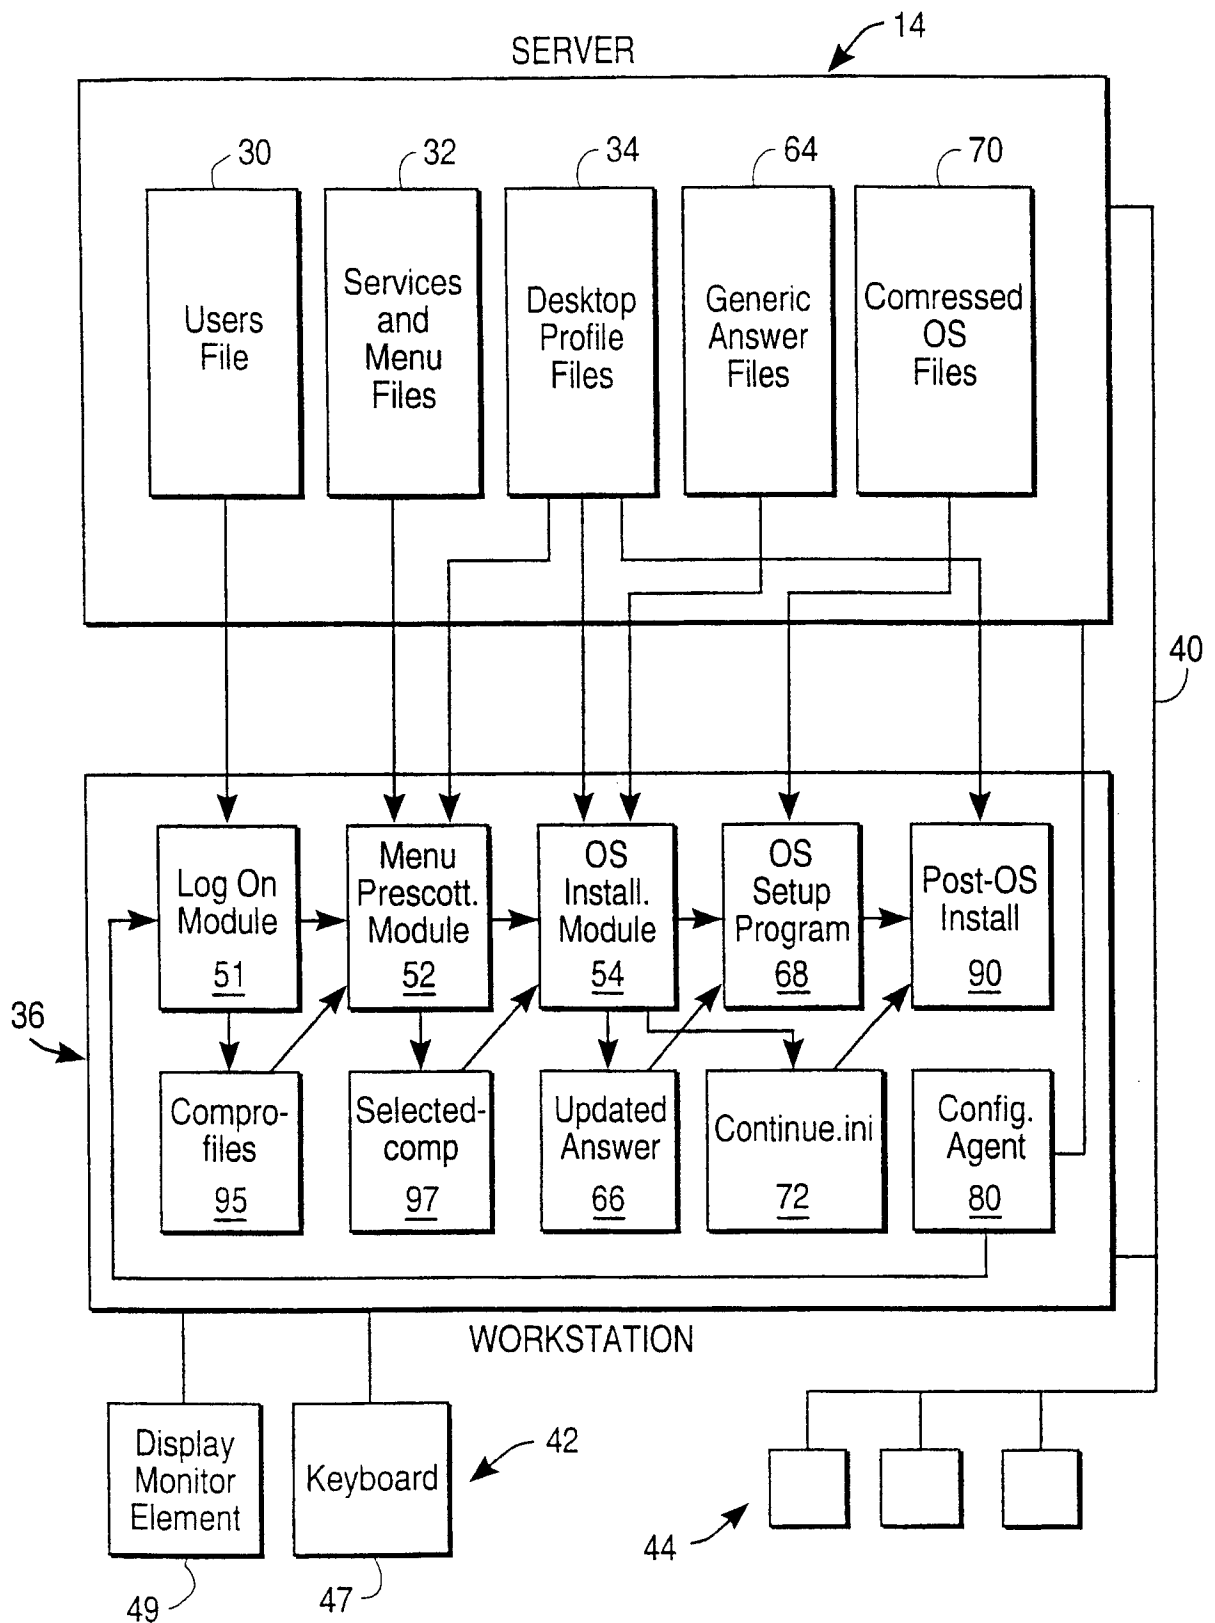


FIG. 4

5/15

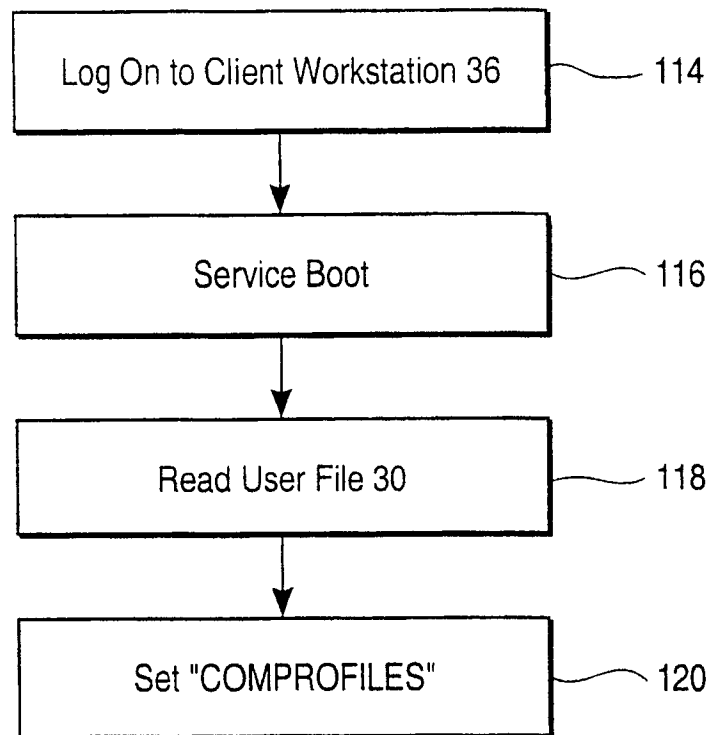


FIG. 5

6/15

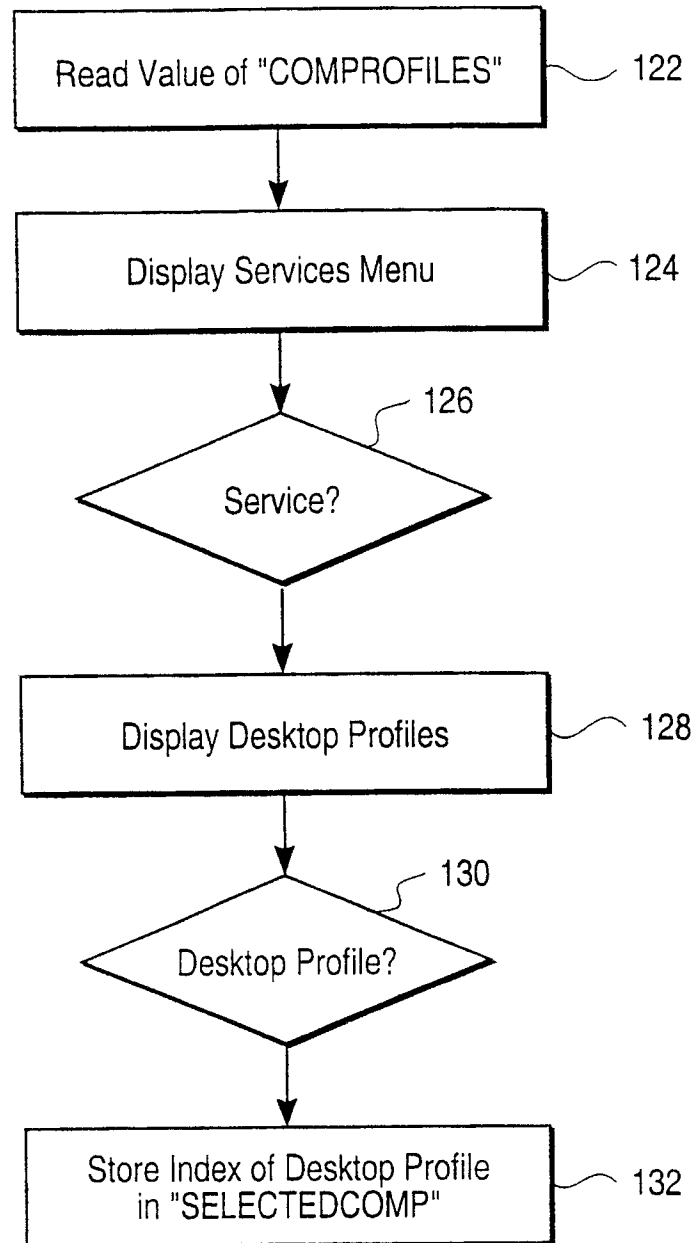


FIG. 6

7/15

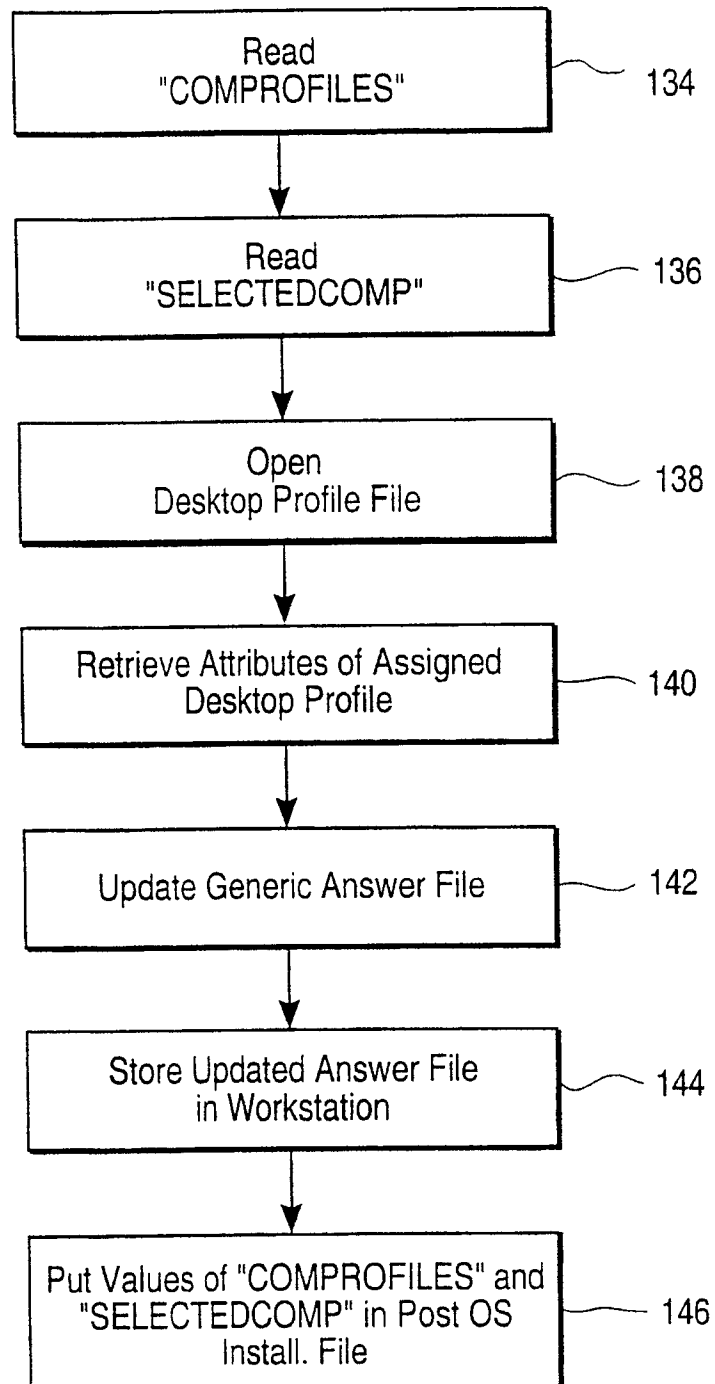


FIG. 7

8/15

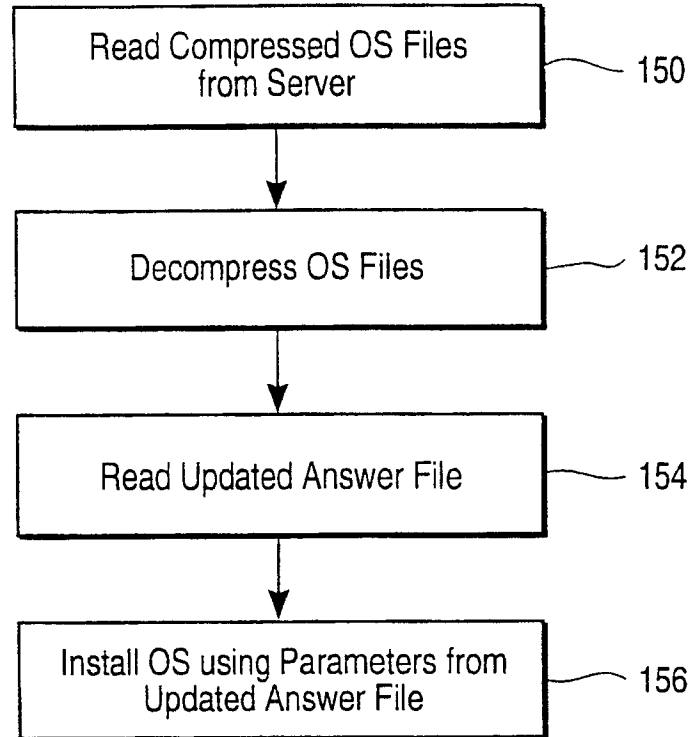


FIG. 8

9/15

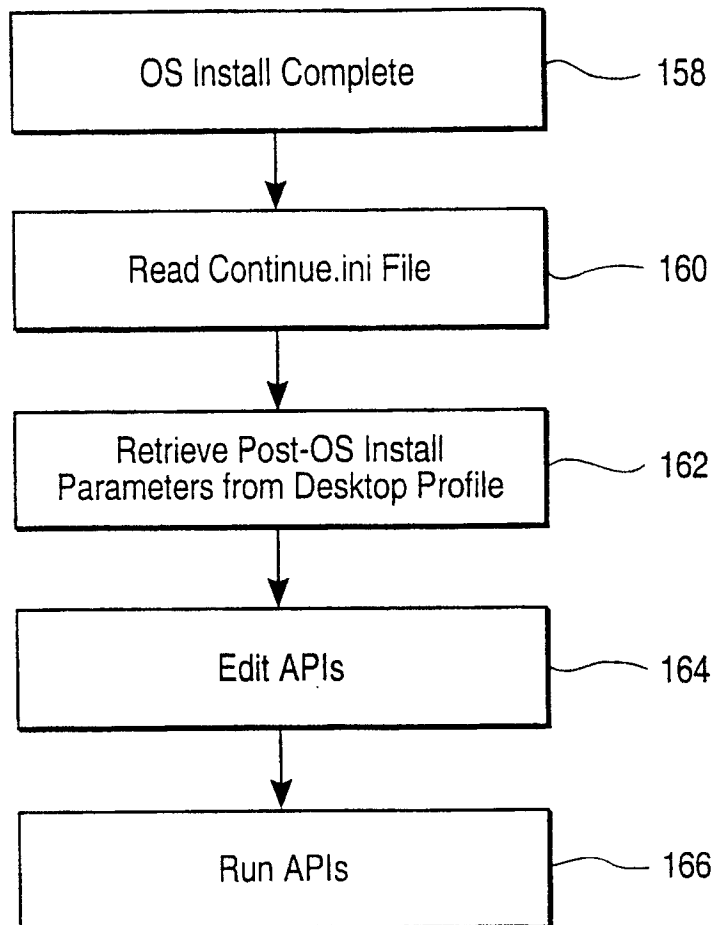


FIG. 9

10/15

The screenshot shows a 'Desktop Profile Wizard' dialog box with a standard Windows-style title bar and window controls. On the left is a vertical list of steps: 'Information', 'Account Information', 'Network Information', and 'Finish'. The 'Information' step is currently selected and highlighted. The main area of the dialog is titled 'Information' and contains several text input fields. The first field is labeled 'Name for this profile (25 char max)' with the example text 'Example Analyst Desktop' and contains the text 'Doug's Desktop'. The second field is labeled 'Computer Name' and contains 'Doug-Desk'. The third field is labeled 'Full User Name' and contains 'Doug User'. The fourth field is labeled 'Organization' and contains 'PLATINUM Technology, Inc.'. The fifth field is labeled 'Product Identification' and contains '1111-2222-3355-4444'. At the bottom of the dialog are five buttons: 'Back', 'Next', 'Finish', 'Cancel', and 'Help'. A curved arrow points from the 'Back' button to the 'Information' step in the left-hand list.

Desktop Profile Wizard

Information

Name for this profile (25 char max)
Example Analyst Desktop

Doug's Desktop

Computer Name

Doug-Desk

Full User Name

Doug User

Organization

PLATINUM Technology, Inc.

Product Identification

1111-2222-3355-4444

Back Next Finish Cancel Help

210 208 222 224 226 228

212 214 216 218 220

FIG. 10A

11/15

Desktop Profile Wizard

Information
Account Information
Network Information
Finish

Account Information

Login Name
doug

☐ Make this user a member of the Administrator group

Password
xxxxxxx

Confirm Password
xxxxxxx

Administrator Password
xxxxxxx

Confirm-Administrator Password
xxxxxxx

Back Next Finish Cancel Help

230 222 224 226 228

232 234 236 238 240 242

FIG. 10B

12/15

Desktop Profile Wizard

Information
Account Information
Network Information
Finish

Network Information

☒ Specify Workgroup Domain Membership Here

☐ Workgroup

☒ Domain

Account Domain

NOTE: The computer name must be the domain specified before installing the operating system on this client PC

☒ Specify IP Address Here

☒ Obtain an IP address from a DHCP server

☐ Specify an IP Address

IP Address

Subnet Mask

Back Next Finish Cancel Help

243 222 224 226 228

244 246 248 250 252 254 256 258 260

FIG. 10C

13/15

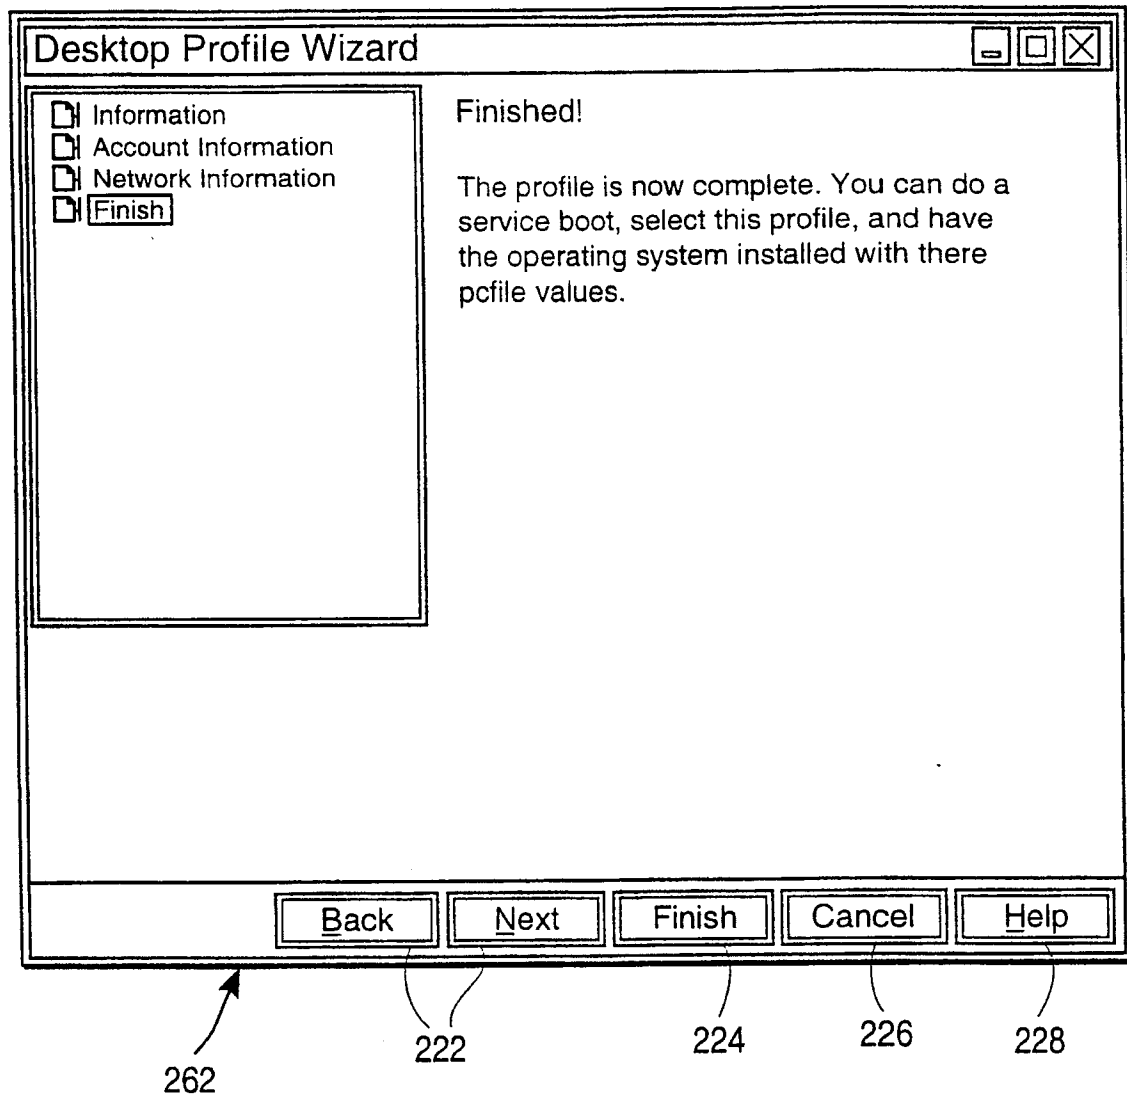


FIG. 10D

14/15

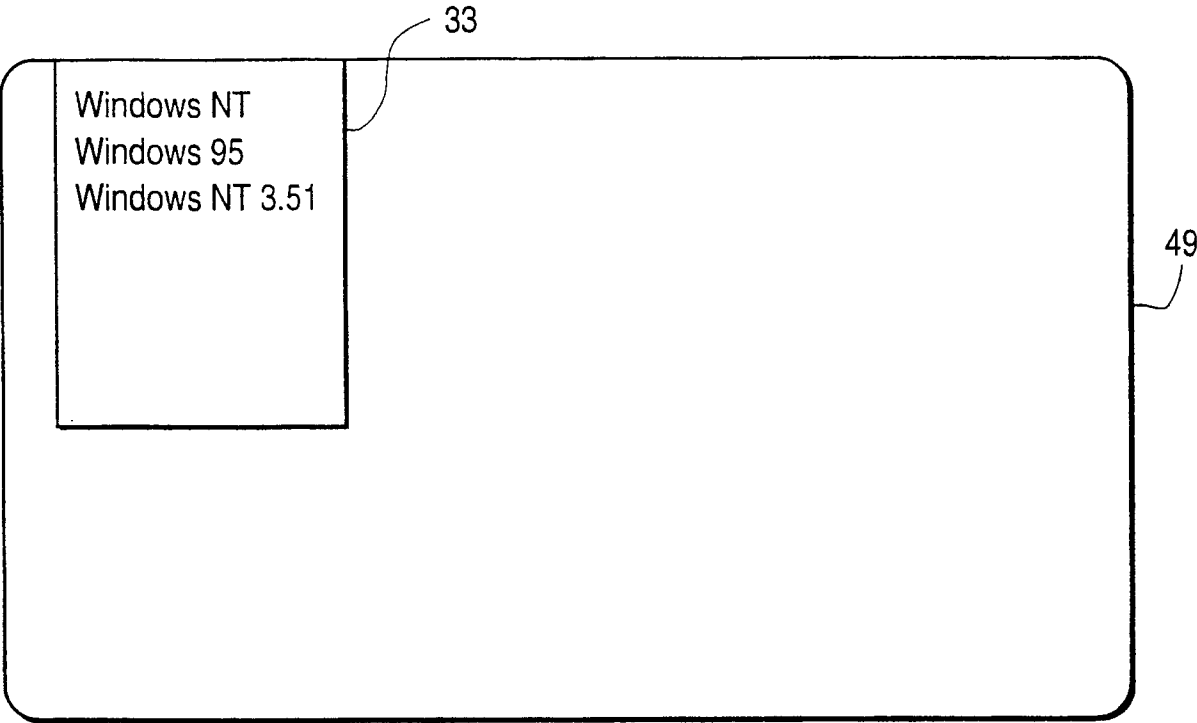


FIG. 11

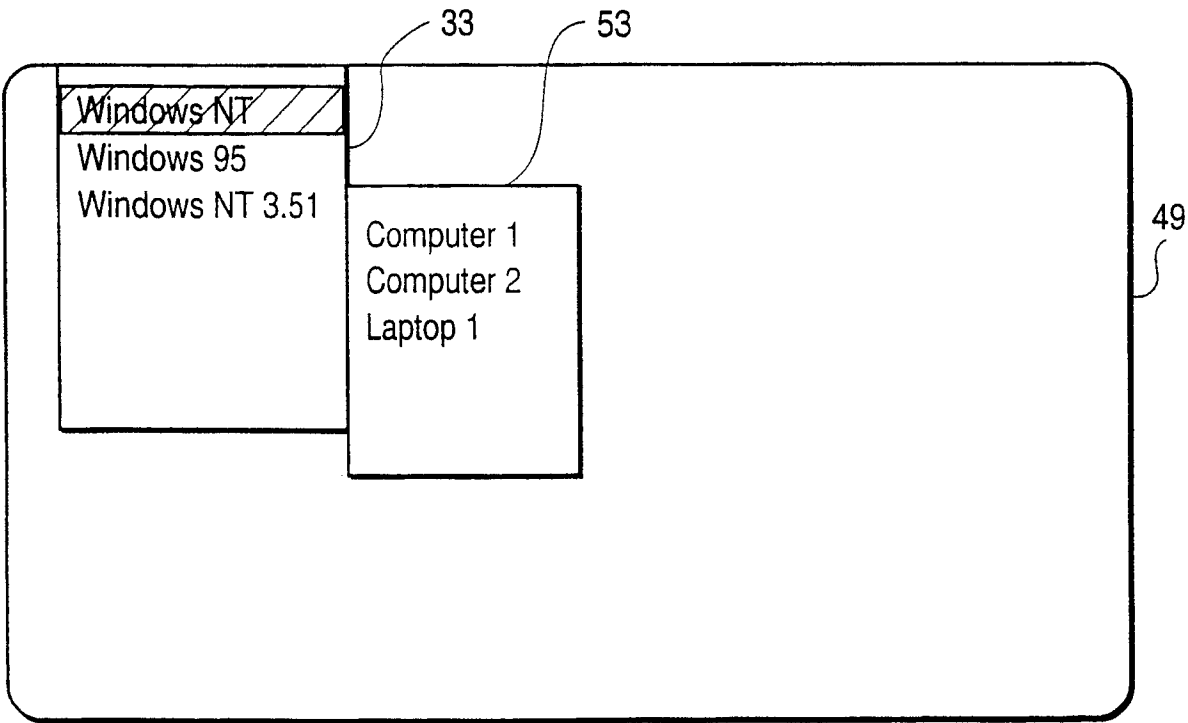


FIG. 12

15/15

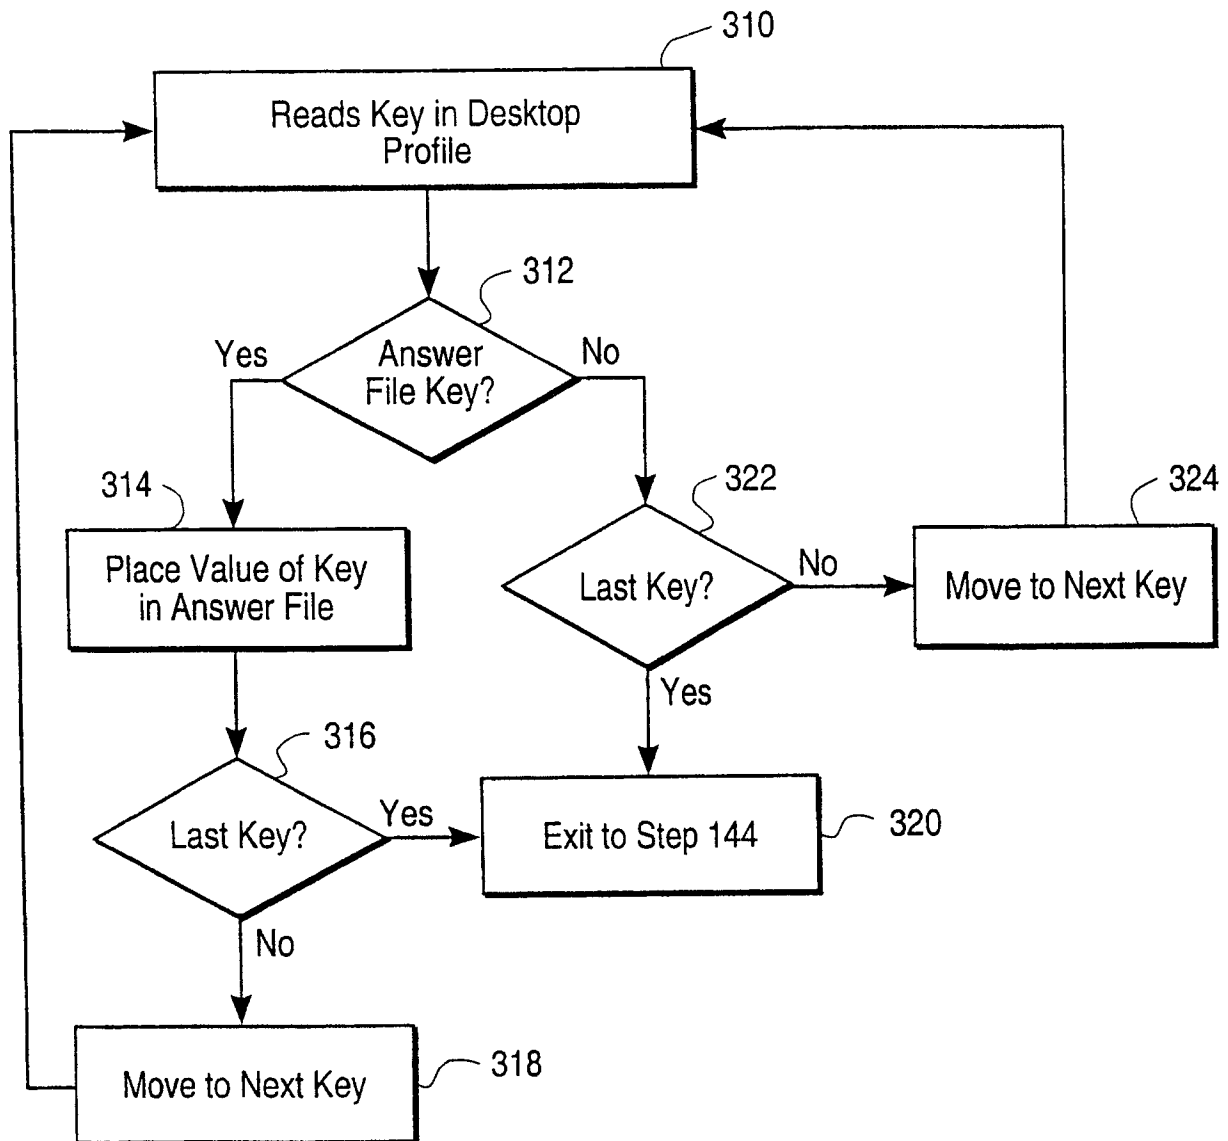


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/25383

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : IPC(7) : GO6F 9/445 , 9/44

US CL : 717/11; 713/1; 709/220

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 717/11,1,2; 713/1,2,100; 709/220,221,222

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

ProQuest, STN, EAST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,247,683 A (HOLMES et al.) 21 September 1993, see abstract.	1-16
A	US 5,261,104 A (BERTRAM et al.) 09 November 1993, col. 2 lines 17-41.	1-16
A	US 5,596,723 A (ROMOHR) 21 January 1997, col. col. 5 line 7 - col. 6 line 55.	1-16
A	US 5,684,952 A (STEIN) 04 November, 1997, see abstract, col. 3 lines 9-23.	1-16
A	US 5,696,968 A (MERKIN) 09 December, 1997, col. 1 line 43 -col. 2 line 13.	1-16

☒ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

14 FEBRUARY 2000

Date of mailing of the international search report

21 MAR 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305 3220

Authorized officer

KAKALI CHAKI

Telephone No. (703) 305 0662

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/25383

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,771,381 A (JONES et al.) 23 June 1998, see abstract.	1-16
A	ELLERIN S., Wizards of Windows installation utilities, Emedia Professional, October 1997, pages 78-90, the whole document.	1-16
A	PAWLAK, A.S., Remote Node and Remote Control: Like Peanut Butter and Chocolate, Network Computing, May 1996, start page 98, the whole document.	1-16
A	FRATTO M., Take Charge of Enterprise Resources With Eight Remote Control Solutions, Network Computing, May 1998, pages 130-144, the whole document.	1-16
A	DRYDEN P., Distribution Tools Bolster Microsoft's SMS, Computerworld, November 1996, pages 59-60, the whole article.	1-16
A	DREWS J., Z.E.N.: Novell's New Management Philosophy, Network Computing, April 1998, the whole document.	1-16
A	LIVINGSTON B., Make Windows Manageable on Your Network, InfoWorld, October 1991, start page S111, the whole document.	1-16